SylBole 140

20W 865

660921109000





Modern and stylish design strict structure, unique appearance, in line with modern needs. Different in the frosted and clear glass to share flexibility with market demand.

CHARACTERISTIC

- Modern and robust design. Supply voltage 220-240V.
- Easy and quick to installation.
- Operating environment temperature: -20°C~+40°C.

APPLICATION

Perfect for commercial areas, hotel, supermarkets.

3 Year WARRANTY | CRI 80 | IP 20 | IK 03 | 100° | LED

OPTICS DATA

Colour Temperature	6500K (CW)
Flux Lumen	2000lm
Beam Angle	100°
Type of Distribution	Directional
Colour Rendering Index (CRI)	80
Lifetime	30000 h L70-B50
Efficiency	100lm/W


PHYSICAL DATA

Finish	White
Grade of Protection IP	IP20
Dimensions (LxWxH)	Φ 140x55mm
Type of Mounting	Recessed
Housing	Aluminum
Lens	Glass
Operation Temperature Ta	-20°C~+40°C


ELECTIRCAL DATA

Input Power	20W
Operating Voltage	220-240V 50/60Hz
Input Current	0.1@AC230V
Power Factor	>0.9
SDCM	<5
Type of Driver	Independent
Dimmable	N/A

DIMENSIONS

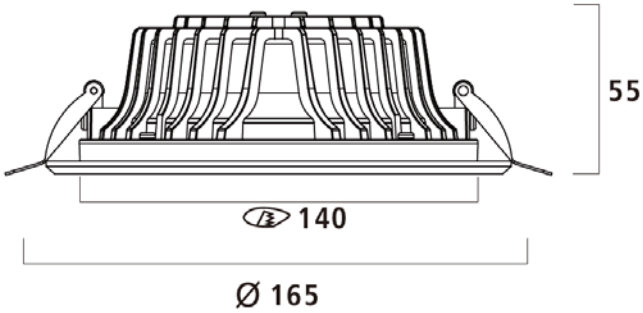

PHOTOMETRICS

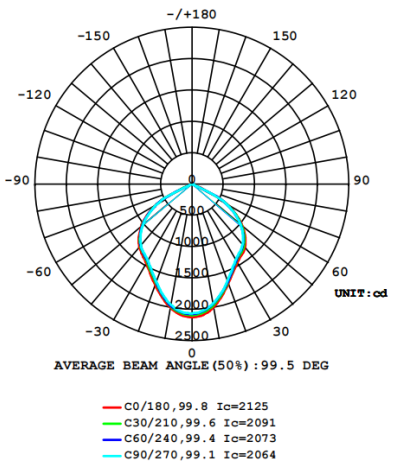

The characteristics of the products may be modified without prior notice depending on the evolution of LED technology. 01/22

Ecological Product: Allows you to save energy compared to traditional products. Mercury free.

by FEILO SYLVANIA