SylFlood Pro

400W 48000lm 730 90D

660933018700



SylFlood Pro LED floodlight for large-scale planar lighting and accent lighting. It is die-cast aluminum housing and professional heat dissipation design. IP65 rated flood light, good waterproof performance, suitable for outdoor environment. Durable high-quality paint, good corrosion protection.

CHARACTERISTIC

- Modern and robust design, resistance to humidity. Supply voltage 100-277V.
- Ideal replacement for projector with traditional high power MG technology.
- Operating environment temperature: -35°C~+45°C.

APPLICATION

Perfect for outdoor areas, docks, parking lots and large commercial areas.

5 Year WARRANTY · IP65 · IK08 · 90° · LED

OPTICS DATA

Colour Temperature	3000K (WW)
Flux Lumen	48000
Beam Angle	90°
Type of Distribution	Directional
Colour Rendering Index (CRI)	>70
Lifetime	50000 h L70B50
Efficiency	120m/W


PHYSICAL DATA

Finish	Grey RAL 9023
Grade of Protection IP	IP65
Dimensions (LxWxH)	393x341x147mm
Type of Mounting	Suspended /Bracket
Housing	Aluminum ADC12
Lens	PC+ Tempered glass
Operation Temperature	-35°C~+45°C


ELECTIRCAL DATA

Input Power	400W
Operating Voltage	100-277V 50/60Hz
Input Current	1.8A@AC230V
Power Factor	>0.9
SDCM	<5
Type of Driver	Independent
Dimmable	N/A

DIMENSIONS

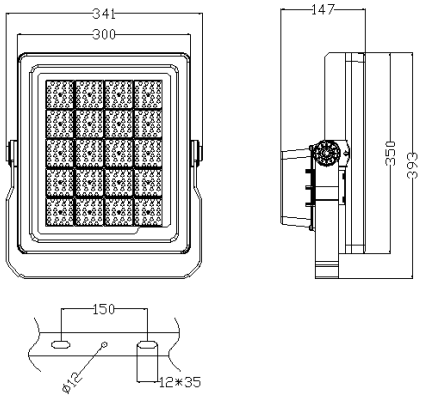

PHOTOMETRICS

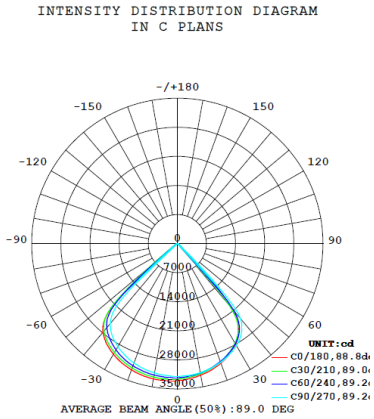

The characteristics of the products may be modified without prior notice depending on the evolution of LED technology. 01/22

Ecological Product: Allows you to save energy compared to traditional products. Mercury free.

by FEILO SYLVANIA