
BCLAB 40W WH LED P

LED "BATTEN"



Features

- Extruded aluminium housing fitted with Engg. Plastic end caps.
- Opal diffuser provides smooth light distribution.
- LED populated on FR4 PCB comprising of LED's connected in series parallel.
- Driver: constant current output driver.
- Very user-friendly and maintenance friendly.
- Suitable for surface mounting application.

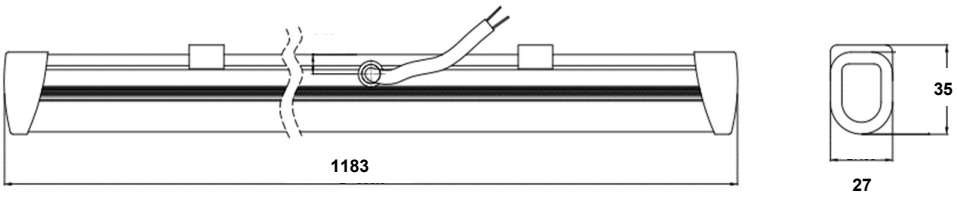

Overall Tolerance ±2mm

General Information	
Product Category	LED Commercial Lighting
System Wattage**	40W
Lumen Flux**	4000 lm
Luminaire Efficacy*	100 lm/W
Correlated Color Temperature	6500K ±510K
Color Rendering Index	>80
Maintenance of lumen output	25,000 hrs.
Operating Temperature Range	-10ºC to +45ºC

Operating and Electrical	
Input Voltage range	140 to 300V AC
Input Frequency	50/60 Hz
System Current in Amp. @240V AC	0.18A
Power Factor	≥ 0.9
THD	<20%
Built-in Surge protection	4 kV

Product data and Ordering data	
Product Cat. Ref.	BCLAB 40W WH LED P
Product Code	113883
Case Lot	20 Nos.
Net Weight	0.285 Kg. Approx.

Approval	
Ingress Protection	IP20

* As per the IS 16107 part 2- sec1 clause no. 8.3, measured luminaire efficacy shall not be less than 90% of rated value.
**As per the IS 16107 part 2- sec1 and 16103 part 2, clause no. 7 and 8.1 respectively, measured luminaire wattage shall not vary by more than +10% of rated value and luminaire lumen shall not vary by less than -10% of rated value.

Doc.No.: ILLUM/TDS/2021/CL/081 Rev-01, Dated.21/05/2021
Note: Data subject to variation due to change/improvement in the design, materials and processes.

BAJAJ LUMINAIRES
Making the difference

ILLUMINATION BUSINESS UNIT,
601, Rustomjee Aspiree, Bhanu Shankar Yagnik Marg,
Off Eastern Express Highway, Sion (E), Mumbai – 400 022.
Email : luminaires@bajajelectricals.com