
BCLAB SP 44L LED CW PC SD

LED "BATTEN"



Features

- Extruded aluminium housing fitted with Engg. Plastic end caps.
- Opal diffuser provides smooth light distribution.
- LED populated on FR4 PCB comprising of LED's connected in series parallel.
- Driver: constant current output driver.
- Very user-friendly and maintenance friendly.
- Suitable for surface/suspended mounting application.

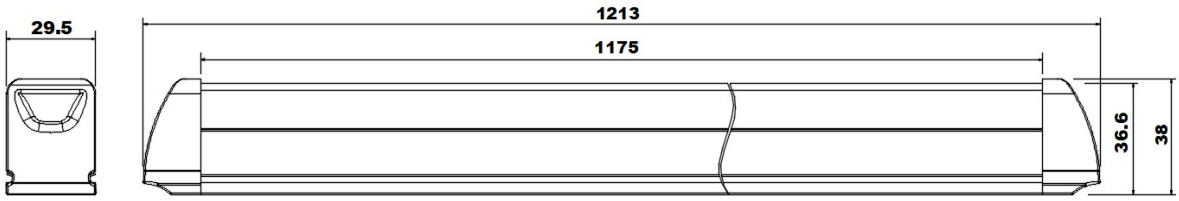

Overall Tolerance ±2mm

General Information	
Product Category	LED Industrial Lighting
System Wattage	40W
Lumen Flux	4400 lm
Luminaire Efficacy (±10%)	110 lm/W
Correlated Color Temperature	6500K ±500K
Color Rendering Index	>80
Maintenance of lumen output	50,000 hrs.
Operating Temperature Range	-10ºC to +50ºC
Beam Angle	120º

Operating and Electrical	
Input Voltage range	140 to 300V AC
Input Frequency	50/60 Hz
System Current in Amp. @240V AC	0.185A
Power Factor	≥ 0.9
THD	<10%
Built-in Surge protection	4 kV

Product data and Ordering data	
Product Cat. Ref.	BCLAB SP 44L LED CW PC SD
Product Code	113137
Case Lot	20 Nos.
Net Weight	0.296 Kg Approx.

Approval	
Ingress Protection	IP20

Rev-01, Dated.17/07/2020

Note: Data subject to variation due to change/improvement in the design, materials and processes.

BAJAJ LUMINAIRES
Making the difference

ILLUMINATION BUSINESS UNIT,
601, Rustomjee Aspiree, Bhanu Shankar Yagnik Marg,
Off Eastern Express Highway, Sion (E), Mumbai – 400 022.
Email : luminaires@bajajelectricals.com