
BCLSB 18 WH

Green LED “BATON”



Features

- Polycarbonate co-extrusion tube for LED light housing with engg-plastic end caps.
- Co-extrusion tube top part is made of polycarbonate material, and the diffuser is made of opal polycarbonate material with groove inside for PCB.
- LED populated on PCB comprising of LED’s connected in series parallel.
- Driver: Constant current output driver.
- 02 Nos. clips provided for easy mounting on surface.

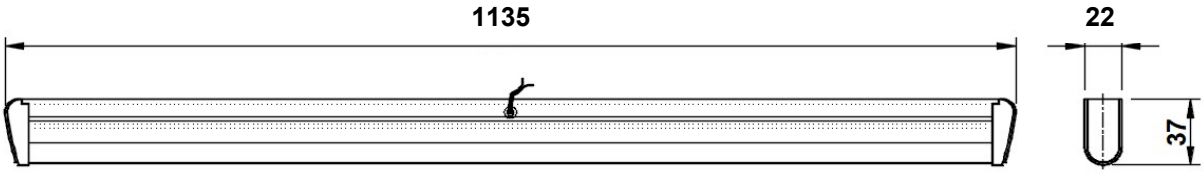

Overall Tolerance ±2mm

General Information	
Product Category	LED Commercial Lighting
System Wattage	18W
Luminous flux (±10%)	1800 lm
Luminaire efficacy (±10%)	100 lm/W
Correlated Color Temperature	6500K ±510K
Color Rendering Index	>80
Maintenance of lumen output	25000 hrs.
Operating Temperature Range	-10°C to 45°C

Operating and Electrical	
Input Voltage	100 to 300V AC
Input Frequency	50/60Hz
System Current in Amp. @240V AC	0.08A
Power Factor	>0.90
THD	≤20%
Built-in Surge Protection	4 kV

Product data and Ordering data	
Product Cat. Ref.	BCLSB 18 WH
Product Code	113724
Product weight	0.145 Kg. Approx.

Approval	
Ingress Protection	IP20

Doc.No: ILLUM/TDS/2021/CL/069 Rev-01, Dated.27/11/2020

Note : Data subject to variation due to change/improvement in the design, materials and processes.

BAJAJ LUMINAIRES
Making the difference

ILLUMINATION BUSINESS UNIT,
601, Rustomjee Aspiree, Bhanu Shankar Yagnik Marg,
Off Eastern Express Highway, Sion (E), Mumbai – 400 022.
Email : luminaires@bajajelectricals.com