
BZRSQL 36L LED GX D CW SD



Recess mounting 2'x 2' LED Luminaire

Features

- CRCA deep-drawn housing comprising of LED's.
- Opal diffuser fixed in separate extruded aluminium frame.
- Opal diffuser frame is fixed to the housing with the screws.
- Driver: Constant current output driver.
- Finish: White powder coated.
- 04 nos., 'L' clamps provided for suspension wire.
- Suitable for 600mm x 600mm modular ceiling.

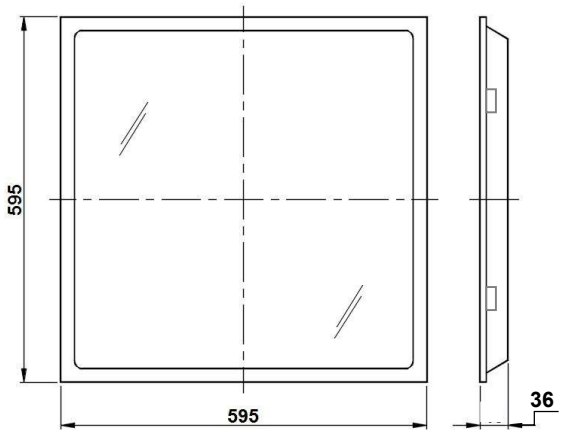

Overall Tolerance ±2mm

General Information	
Product Category	LED Commercial Lighting
System Wattage	36W
Luminous flux (±10%)	3600 lm
Luminaire efficacy	100 lm/W
Correlated Color Temperature	6500K ±510K
Color Rendering Index	>80
Maintenance of lumen output	50,000 hrs.
Operating Temperature Range	-10°C to 45°C

Operating and Electrical	
Input Voltage	140 to 270V AC
Input Frequency	50 Hz
System Current in Amp. @240V AC	0.16A
Power Factor	≥ 0.95
THD	<10%
Built-in Surge protection	3 kV

Product data and Ordering data	
Product Cat. Ref.	BZRSQL 36L LED GX D CW SD
Product Code	113560
Case Lot	4 nos.
Net weight	2 kg Approx.

Approval	
Ingress Protection	IP20

Doc.No.: ILLUM/TDS/2021/CL/027 Rev-03, Dated.07/08/2020

Note : Data subject to variation due to change/improvement in the design, materials and processes.

BAJAJ LUMINAIRES
Making the difference

ILLUMINATION BUSINESS UNIT,
601, Rustomjee Aspiree, Bhanu Shankar Yagnik Marg,
Off Eastern Express Highway, Sion (E), Mumbai – 400 022.
Email : luminaires@bajajelectricals.com