

LED Panels



Ivy Backlit Panel

3 Year WARRANTY


30,000 HRS LIFETIME

CRI 80 IP 20 HZ 50/60



The range is a highly efficient range of LED panel luminaires. Ideal for offices, meeting rooms, corridors, breakout areas and other general indoor lighting applications.

+ Slim profile of 35mm-suitable for restricted ceiling space.
+ Temperature operation: -10˚C~+40˚C.
+ Emergency kit: 220~240V input charging, 0V input discharging, 62mA output more than 3 hours.
+ Surface mounted frame is available.

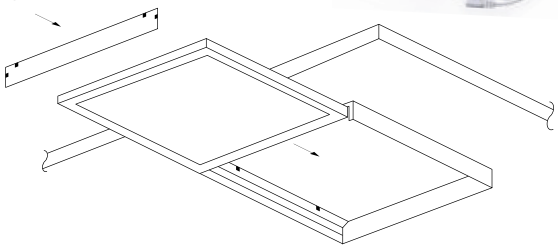

Product Information

Description	Rated Voltage (V)	Total Power Consumption (W)	Fixture Lumen (lm)	Dimension (mm)	PF	Colour Temperature (K)
Ivy Backlit Panel 36W	220 - 240	36	3,600	595×595×32	0.9	3,000 / 4,000 / 6,500
Ivy Backlit Panel 36W HE	220 - 240	36	4,000	595×595×32	0.9	3,000 / 4,000 / 6,500
Ivy Backlit Panel 36W	220 - 240	36	3,600	1,195×595×32	0.9	3,000 / 4,000 / 6,500
Ivy Backlit Panel 36W HE	220 - 240	36	4,000	1,195×595×32	0.9	3,000 / 4,000 / 6,500
Ivy Backlit Panel 40W	220 - 240	40	4,000	595×595×35	0.9	3,000 / 4,000 / 6,500
Ivy Backlit Panel 46W	220 - 240	46	4,800	1,195×595×32	0.9	3,000 / 4,000 / 6,500
Ivy Backlit Panel 48W HE	220 - 240	48	5,280	595×595×35	0.9	3,000 / 4,000 / 6,500
Surface Mounted Frame	-------	---	-------	595×595	---	-------
Emergency Kit	3.6DC	---	-------	213×95×40	---	-------