
SylFlood Pro

400W 48000lm 730 90D

660928083100

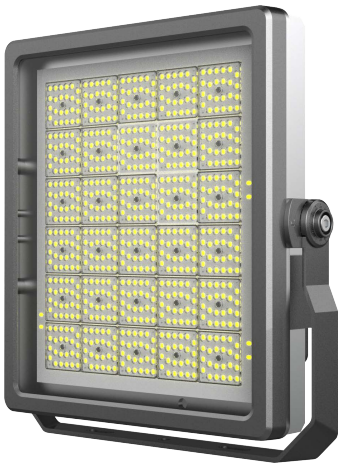

SylFlood Pro LED floodlight for large-scale planar lighting and accent lighting.It is die-cast aluminum housing and professional heat dissipation design.IP65 rated flood light, good waterproof performance, suitable for outdoor environment. Durable high-quality paint, good corrosion protection.

CHARACTERISTIC

Ç Modern and robust design, resistant to humidity.Supply voltage 100-277V Ç Ideal replacement for projector with traditional high power MH technology. Ç Operating environment temperature: -35 ÃC ~ 45 ÃC.

APPLICATION

Perfect for outdoor areas, airports, supermarkets, warehouses, superstores and large commercial areas.

OPTICS DATA

Color Temperature	3000 K (WW)
Flux Lumen	48000 lm
Beam Angle	90°
Type of Distribution	Directional
Color Rendering Index (CRI)	>70
Lifetime	50000 h L70B50
Efficiency	120 lm/W


PHYSICAL DATA

Finish	Grey RAL9023
Grade of Protection IP	IP65
Dimensiones (LxWxH)	393x350x147 mm
Type of Mounting	Suspended/Bracket
Housing	Aluminum ADC12
Diffuser	PC+Glass
Operation Temperature Ta	-35°C ~ +45°C

ELECTIRCAL DATA


Input Power	400W
Operting Voltage	100-277V 50/60 Hz
Input Current	1.8 A @ 230V
Power Factor	>0.9
SDCM	<5
Type of Driver	Independent
Dimmable	N/A

DIMENSIONS

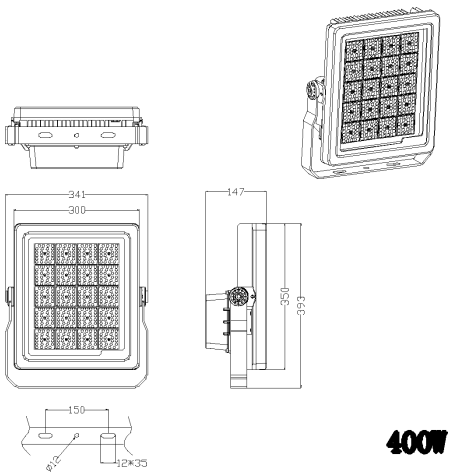

400W

PHOTOMETRICS

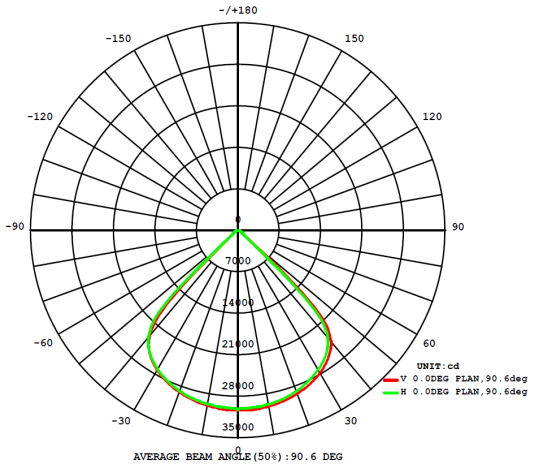

The characteristics of the products may be modified without prior notice depending on the evolution of LED technology. 01/22

Ecological Product: Allows you to save energy compared to traditional products. Mercury free.

by FEILO SYLVANIA